



Greenshine



# CLASSICA

Cost Effective Solar Lighting Solutions



# CLASSICA | GENERAL SPECIFICATIONS



Greenshine

## Light Fixture (GS-LED-CL)

Luminaire Input Voltage	DC 12V   24V
Power Consumption	30W
Lumen	3000 lumens
Color Temperature	4000K
IES Lighting Type	Type III   V
Material	Die-cast aluminum



## Solar Panel ( 8 Units)

**40W**

Rating Power	40 W
Maximum Power Voltage	18.92 V
Maximum Power Current	2.12 A
Open Circuit Current	23.65 V
Short Circuit Current	2.26
Size	65" x 8"
Weight	11 lb

## Battery (1 or 2 Units)

Battery Type	GEL Deep Cycle Lead-Acid
Operating Voltage	12 V
Capacity	120 Ah at 20 hr-rate to 1.75 V per cell at 77°F
Dimensions	16(L)×7(W)×9.2(H) (in)
Expected Life	5 ~ 7 years

## Solar Charger

Operating Voltage	12 V/24 V auto recognition
Max. Charge / Load Current	5 A/ 10 A/ 20 A (different models)
Night / Day Detection	2.5 V – 10 V
IP Class	IP68

## Pole

Height	20 ft
Diameter	8" at the bottom, 8" at the top
Thickness	5/32"
Material	Galvanized Steel
Finishing	Powder Coating



## 8 x 40W

Volta solar wrapped pole consists of 8 x 40W solar panel. The solar panel back frame is anodized with black color finish, ideal for all kinds of outdoor weather condition use.

Each solar panel is with MC4 type connectors, easy to connect.

<b><u>Rating Power</u></b>	40W
<b><u>Production Tolerance</u></b>	± 3%
<b><u>Maximum Power Voltage</u></b>	18.92 V
<b><u>Maximum Power Current</u></b>	2.12 A
<b><u>Open Circuit Voltage</u></b>	23.65 V
<b><u>Short Circuit Current</u></b>	2.26 A
<b><u>Frame</u></b>	Anodized aluminum, 4mm thickness
<b><u>Dimensions</u></b>	1650mm x 200mm x 40mm 65" x 8" x 1.6" 5Kg / 11lb
<b><u>Test Temperature</u></b>	25°C / 77°F, 1000w/m <sup>2</sup> , Air Mass 1.5
<b><u>Junction box / Wiring</u></b>	IP65 Junction box with 900mm cable with MC4 connectors



# GREENSHINE GEL-TYPE BATTERY

Solar Powered LED Lighting System



Greenshine

## OVERVIEW

GEL deep cycle battery with a 12 years floating design life is especially designed for frequent cyclic discharge under extreme temperature.




	GS-GEL-H80	GS-GEL-H120	GS-GEL-H150	GS-GEL-H200
Cells per unit	6	6	6	6
Voltage per unit	12V	12V	12V	12V
Capacity	80Ah @ 20hr-rate to 1.75V per cell @ 25°C / 77°F	120Ah @ 20hr-rate to 1.75V per cell @ 25°C / 77°F	150Ah @ 20hr-rate to 1.75V per cell @ 25°C / 77°F	200Ah @ 20hr-rate to 1.75V per cell @ 25°C / 77°F
Weight	26kg / 58lb	38kg / 84lb	46kg / 100lb	59.2kg / 131.5lb
Dimensions L x W x H	330 x 172 x 214(mm) 13" x 7" x 8.5"	406 x 173 x 233(mm) 16" x 7" x 9.2"	483 x 170 x 240(mm) 19" x 6.7" x 9.5"	522 x 240 x 218(mm) 20.5" x 9.44" x 8.7"
Max Discharge Current	800A (5 Sec)	1200A (5 Sec)	1500A (5 Sec)	2000A (5 Sec) <sup>2</sup>
Operating Temp. range	-40°C~60°C   -40°F~140°F			
Flot Charging Voltage	13.6 to 13.8 VDC / unit average at 25°C / 77°F			
Recommended max. charging current	16A	24A	30A	40A
Self-discharge	Valve Regulated Lead Acid can be stored for more than 6 months at 25°C/77°F. Self-discharge ratio less than 3% per month at 25°C/77°F. Please charge batteries before using.			
Equalization and cycle service	14.6 to 14.8 VDC / unit average at 25°C / 77°F			
Terminal type	5ft cooper wire leads from the battery case			


# GREENSHINE GEL-TYPE BATTERY




Life characteristics of cyclic use

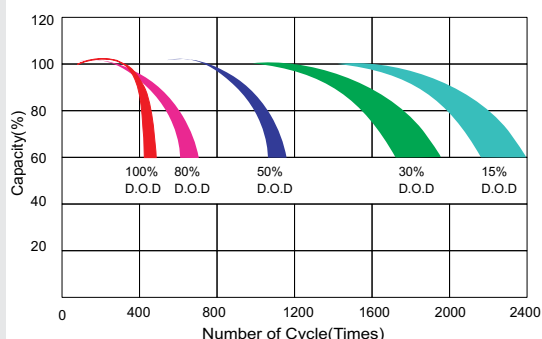


Storage characteristic

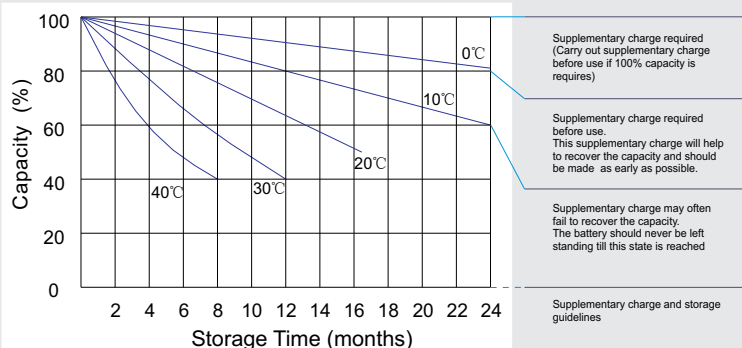

Charge characteristic curve for cyclic use

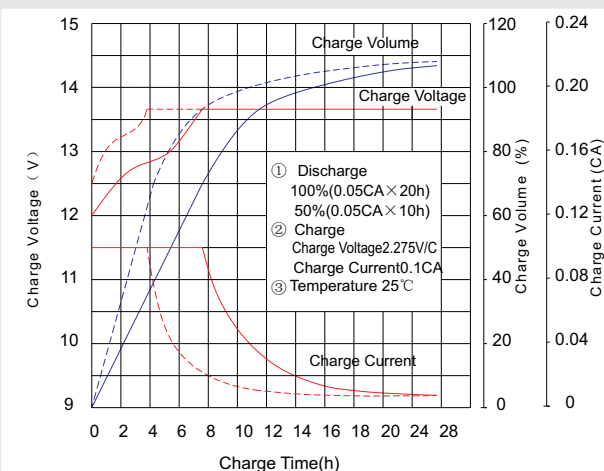

Discharge characteristic curve

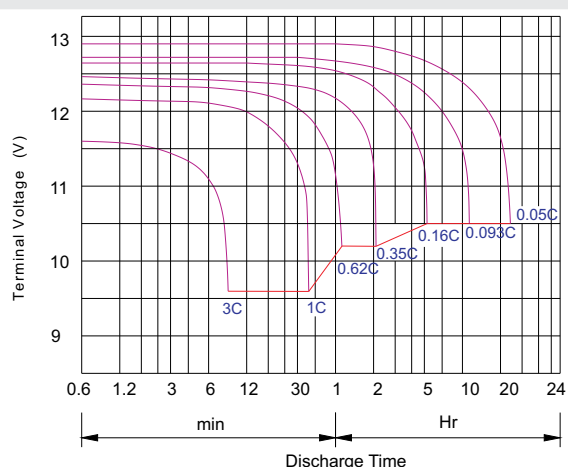

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V /cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

Charging Method:

Constant Voltage	-0.2Cx2h+14.4-14.7Vx24h, Max. Current 0.2C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.2Cx6h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6-7N-m	8-10N-m	10-12N-m

## Maintenance & Cautions

### Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.

# GREENSHINE CONTROLLER

## Solar Powered LED Lighting System



### FEATURES

- Corrosion-proof epoxy-encapsulated PCB (IP68)
- Four-stage battery charging (main, float, boost, equalization)
- Temperature compensated
- Automatic system voltage recognition (12V/24V)
- Customized by Greenshine to fit specific needs of clients
- Easy to install

### SPECIFICATIONS

System Voltage

Max. charge / load current

#### Deep discharge protection:

Cut-off Voltage

Reconnect Level

Overvoltage Protection

Undervoltage Protection

Max. Panel Voltage

Temperature compensation

(Charge Voltage)

Ambient Temperature

Max. Altitude

Battery Type

#### Adjustment Range:

Evening / Morning Hours

Night / Day Detection

Wire Cross Section

Type of Protection

12V | 24 Auto Recognition

5A | 10A | 20A (Different Models)

11V - 12V | 22V - 24V

12.8V | 25.6V

15.5V | 31.0V

10.5V | 21V

$U_{BATmin} + 30V$  (if module and battery are connected with correct polarity)

-25mV | K at 12V

-50mV | K at 24V

-40°C to +60°C, -40°F to +140°F

4,000m above sea level

Lead acid (GEL, AGM, flooded)

0 – 15h | 0 – 14h







2.5V – 10V

1.5mm<sup>2</sup>/ 1.5mm<sup>2</sup>/ 2.5mm<sup>2</sup>, 15 (AWG)

IP68 (1.5 m, 72 h)





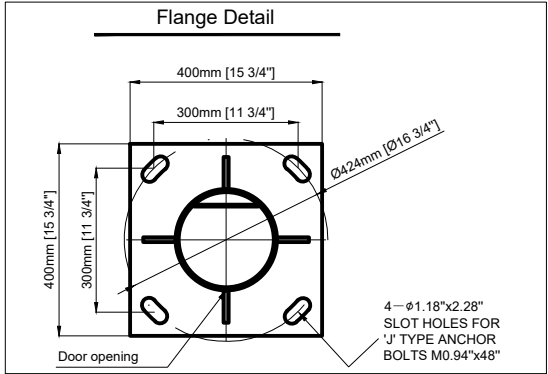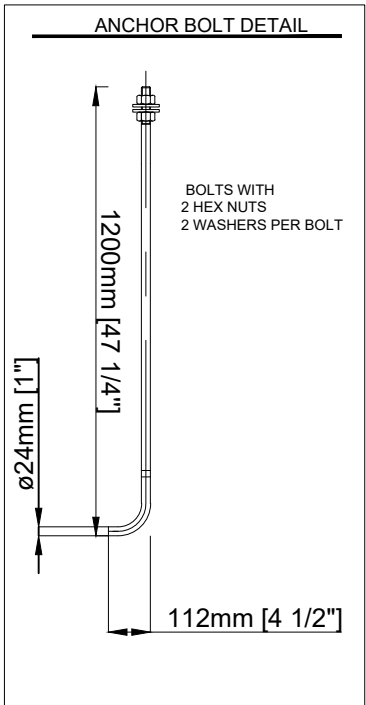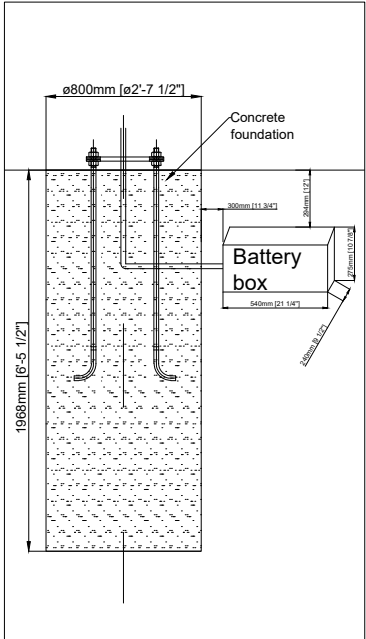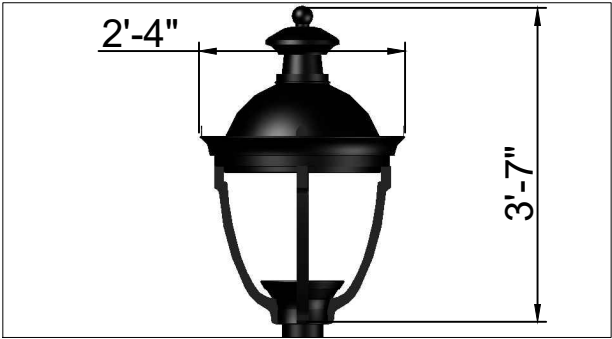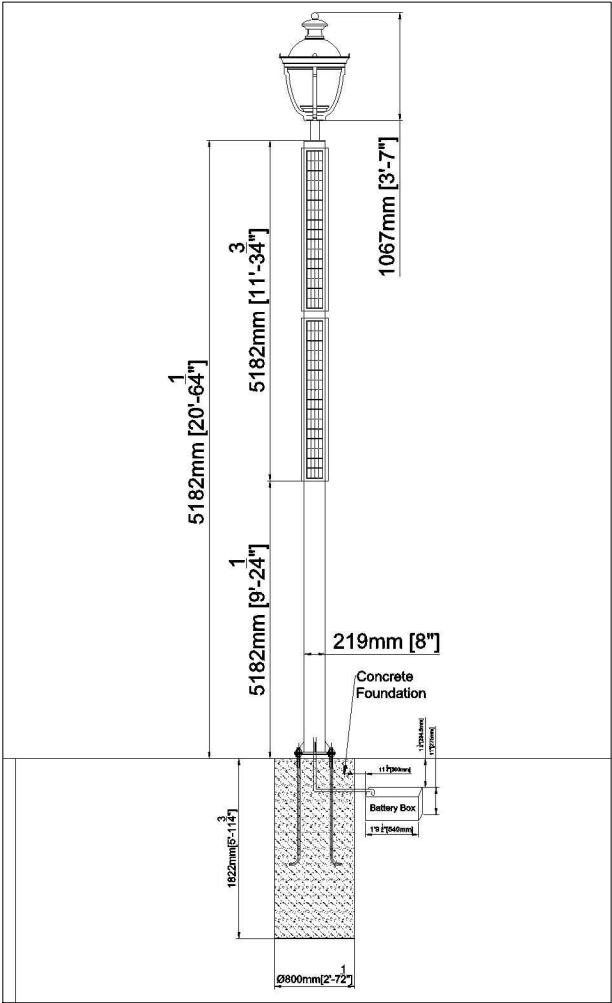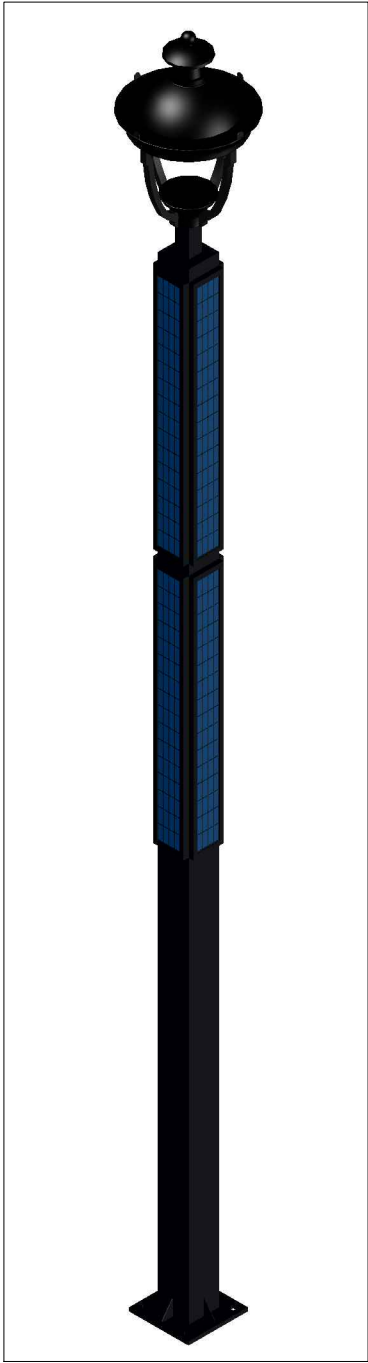

- Foundation dimensions shall be confirmed by a local engineering company. Greenstine New energy will not be held liable for any defect of the concrete foundation due to improper sizing.
- Drawings are based using hot-dipped galvanized steel, powder coating with a thickness of  $\frac{3}{32}$ ".
- \*EPA of the system exclude the EPA of the pole, includes the solar panels, brackets, arm and LED fixture and battery box.
- \*\*Wind resistance of the poles are indicative and further customization can be provided.

Tilt angle of the solar panels	15	30	45	60
EPA (ft <sup>2</sup> )*	6.68	9.31	11.57	13.3
Wind resistance** (mph)	145	145	145	145

Proposal			
System	Volta + Classica - 20' Pole		
By	Luis Jimenez	Date	12/18/2018
<a href="http://www.streetlights-solar.com">www.streetlights-solar.com</a>			